







#### **■** Features

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty


# Applications

- · LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

# Description

HLG-40H series is a 40W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-40H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 89.5%, with the fanless design, the entire series is able to operate for -40°C ~ +80°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-40H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding

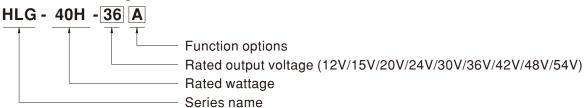

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	I o and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




MODEL	ATION	HLG-40H-12	HLG-40H-15	HLG-40H-20	HLG-40H-24	HLG-40H-30	HLG-40H-36	HLG-40H-42	HLG-40H-48	HLG-40H-54	
MODEL	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
	CONSTANT CURRENT REGION Note.4		9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	RATED CURRENT	3.33A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.75A	
	RATED POWER	39.96W	40.05W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	40.5W	
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	
	RIFFLE & NOISE (IIIax.) Note.2	Adjustable for				200111Vp-p	200111Vp-p	200111γρ-ρ	300IIIVP-P	зооттур-р	
	VOLTAGE ADJ. RANGE				· ·	27 - 22\/	22 ~ 40\/	10 ~ 16\/	14 - F2\/	40 - 501/	
OUTPUT		10.8 ~ 13.5 V   13.5 ~ 17 V   17 ~ 22 V   22 ~ 27 V   27 ~ 33 V   33 ~ 40 V   40 ~ 46 V   44 ~ 53 V   49 ~ 58 V   Adjustable for A-Type only (via built-in potentiometer)									
	CURRENT ADJ. RANGE		1.6 ~ 2.67A			0.0 4.244	0.67 - 1.124	0.58 ~ 0.96A	0.5. 0.044	0.45 0.754	
	VOLTACE TOLEDANCE NO.			1.2 ~ 2A	1 ~ 1.67A	0.8 ~ 1.34A		+		0.45 ~ 0.75A	
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
		500ms,80ms/		0ms,80ms/23	0VAC						
	HOLD UP TIME (Typ.)	16ms / 115VAC, 230VAC									
	VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 431								
	TOZINTOZ TOTILOZ	(Please refer to "STATIC CHARACTERISTIC" section)									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	PF≧0.98/115	VAC, PF≧0.9	5/230VAC, PF	≥0.92/277VA	C @ full load					
INPUT	POWER PACTOR (Typ.)	(Please refer t	o "POWER FA	CTOR (PF) CH	IARACTERIST	IC" section)					
	TOTAL HARMONIC DISTORTION	THD< 20% (@	@ load≧60% <i>i</i>	/ 115VAC,230	VAC; @ load	≥75% / 277VA	C)				
	TOTAL HARMONIC DISTORTION	(Please refer	to "TOTAL HA	ARMONIC DIS	STORTION (TH	HD)" section)					
	EFFICIENCY (Typ.)	86.5%	86.5%	88%	88%	88.5%	88.5%	88.5%	89.5%	89.5%	
	AC CURRENT (Typ.)	0.43A / 115VA	C 0.24A	/ 230VAC	0.23A / 277V	AC .			'		
	INRUSH CURRENT(Typ.)										
	MAX. No. of PSUs on 16A	2-22 2 2 Qau 2. open modeland at 00 to pount at 200 to 05 to 11 to 11 to 11 to									
	CIRCUIT BREAKER	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	<0.75mA / 277VAC									
		95 ~ 108%									
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed									
PROTECTION		15 ~ 21V	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 65V	59 ~ 68V	
	OVER VOLTAGE							1.0		100	
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover									
		Shut down o/p voltage, re-power on to recover									
	WORKING TEMP.	Tcase= -40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)  Tcase= +80°C									
	MAX. CASE TEMP.										
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY		40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08 , TUV EN61347-1, EN61347-2-13 independent ,GB19510.1,GB19510.14,IP65 or IP67									
	approved ;optional models for J61347-1, J61347-2-13; design refer to UL60950-1, TUV EN60950-1, EN							0950-1, EN60	335-1		
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC									
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION Note.8	3 Compliance to EN55015, EN61000-3-2 Class C (@ load≥60%) ; EN61000-3-3,GB17743 and GB17625.1									
	EMC IMMUNITY	Compliance to	EN61000-4-2	2,3,4,5,6,8,11;	EN61547, EN5	55024, light indu	ustry level (sur	ge immunity Lir	ne-Earth 4KV, I	Line-Line 2KV)	
	MTBF	1131.9K hrs m	in. Telcordi	a SR-332 (Bel	Icore); 336.5K	hrs min. MII	L-HDBK-217F	(25°℃)			
OTHERS	DIMENSION	171*61.5*36.8mm (L*W*H)									
	PACKING	0.73Kg; 20pcs	/15.6Kg/0.9Cl	JFT							
NOTE		ally mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.									
HOIL	2. Ripple & noise are measure					e terminated w	ith a 0.1uf & 4	7uf parallel ca	pacitor.		
	3. Tolerance: includes set up tolerance, line regulation and load regulation.										
	· ·										
	4. Please refer to "DRIVING N				TATIO 01145	ACTEDICTIC:					
	· ·	nder low input	voltages. Plea	se refer to "S							

- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly tc point (or TMP, per DLC), is about  $75^{\circ}$ C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com




### ■ BLOCK DIAGRAM

Fosc: 100KHz

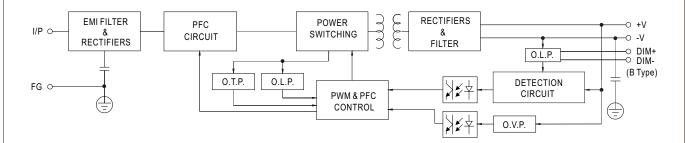

### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

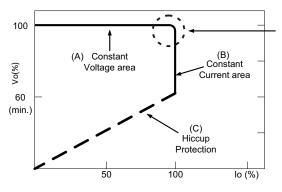


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




## ■ DIMMING OPERATION

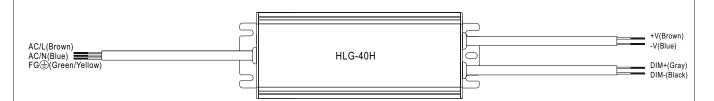


#### imes 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

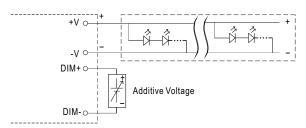


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

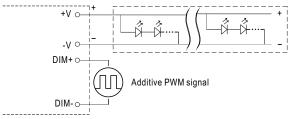



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

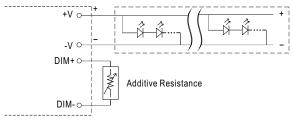

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

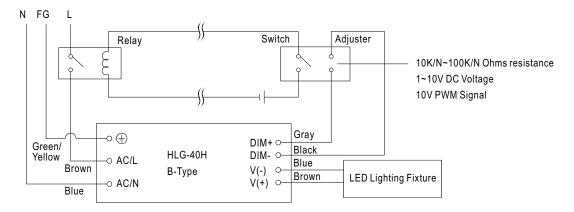


Using a switch and relay can turn ON/OFF the lighting fixture.



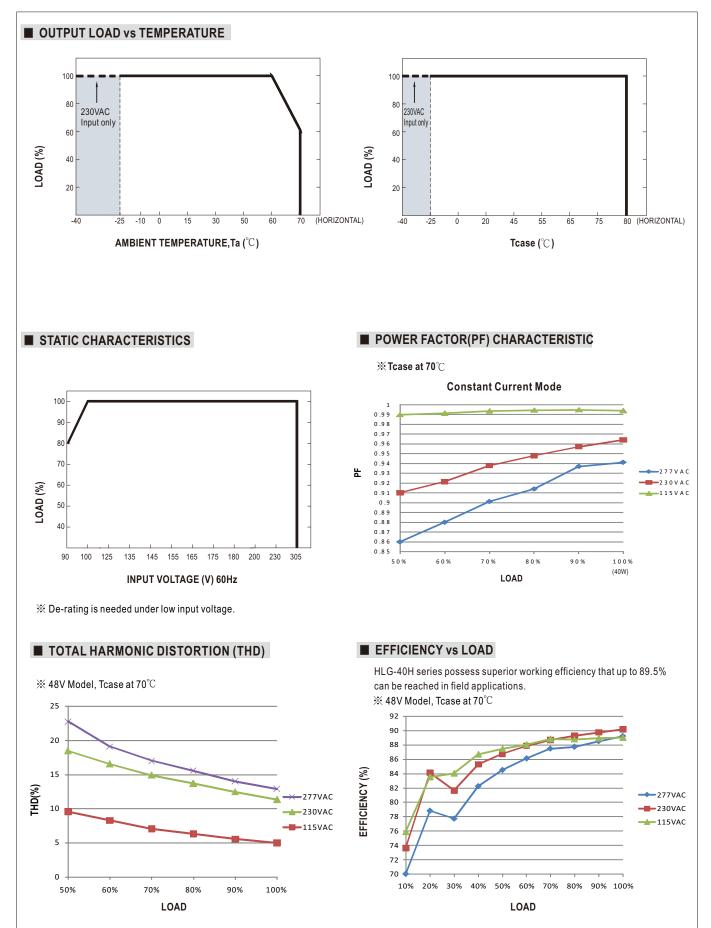




# **■** LIFETIME

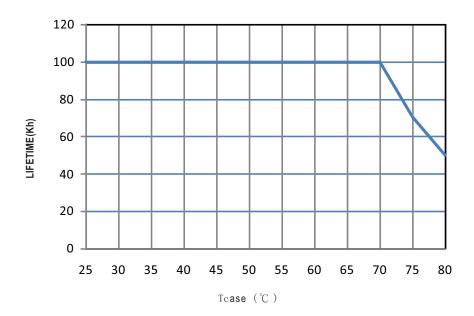



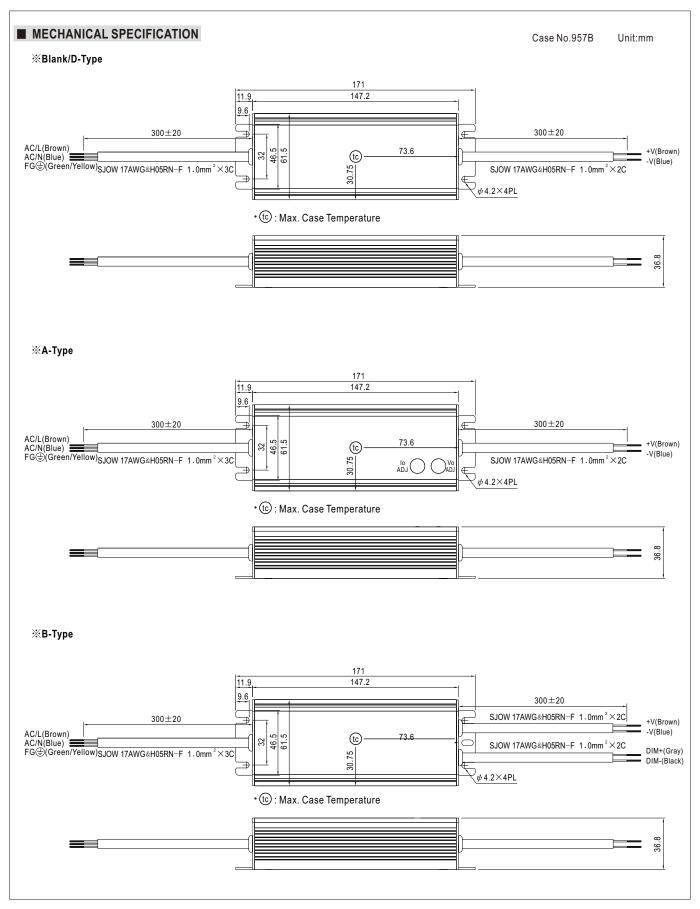




#### **■ WATERPROOF CONNECTION**


## ※ Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-40H to operate in dry/wet/damp or outdoor environment.




Pin Configuration (Female)			
000	000		
4-PIN	5-PIN		
5A/PIN	5A/PIN		
M12-04	M12-05		
10A max.	10A max.		
	4-PIN 5A/PIN M12-04		

Size	Pin Configuration (Female)			
M15	(o)			
IVITS	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			



#### ※ Cable Joiner

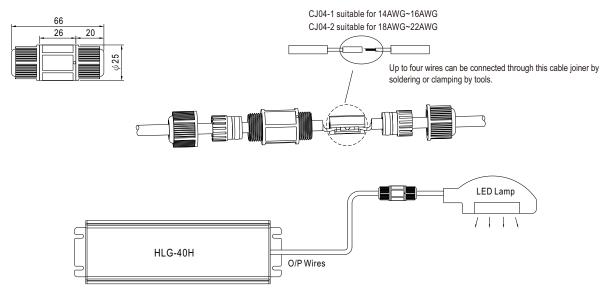

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

### ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html